

CUBE⁺ HYPER LIGHT TOWER


CUBE⁺ HYPER

The special CUBE⁺ HYPER version by Generac® Mobile is a lighting tower equipped with the new Omnia® LED Technology allowing the operator to point the floodlights in every direction, to provide 360° illumination. Also available with anti-glare floodlights.



GTL01 DIGITAL CONTROLLER

A digital controller specifically studied to manage every function of the light tower for ultimate control.

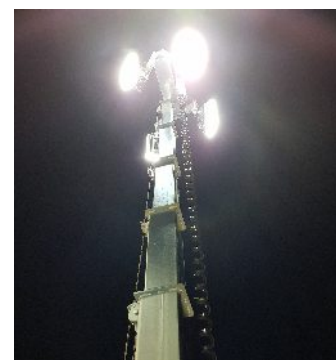


CUBE⁺ HYPER K2

CUBE⁺ HYPER Y2

TECHNICAL DATA			
Minimum dimensions (mm)	Length x Width x Height	1220 x 1150 x 2420	1220 x 1150 x 2420
Maximum dimensions (mm)	Length x Width x Height	1790 x 1740 x 8400	1790 x 1740 x 8400
Dry weight (kg)		1070	1070
Lifting system	M:Manual / H:Hydraulic	H	H
Mast rotation (°)		340	340
Lamps power (W)		4 x 320	4 x 320
Lamps type	MH:MetalHalide / LD:LED	LD	LD
Total lumen (Lm)		184000	184000
Illuminated area (m²)	180° / 360°	4500 / 4200	4500 / 4200
Engine		Kubota Z482	Yanmar 2TN
Engine cooling	W: Liquid / A: Air	L	L
Cylinders (q.ty)		2	2
Engine speed (RPM)	50 / 60 Hz	1500 / 1800	1500 / 1800
Liquid containment (110%)	√:Yes / ●:No	√	√
Alternator	kVA/V/Hz	5/220/50 - 5/240/60	5/220/50 - 5/240/60
Outlet Socket	kVA/V/Hz	2,5/220/50 - 2,5/240/60	2,5/220/50 - 2,5/240/60
Inlet plug	A/V/Hz	16/220/50 - 16/240/60	16/220/50 - 16/240/60
Avg. sound pressure	dB(A) @ 7m	58	59
Wind speed resistance (km/h)		80	80
Tank capacity (liters)		170	170
Total running time (h)		283	254

CUBE⁺ HYPER LIGHT TOWER

OMNIA[®] LED TECHNOLOGY

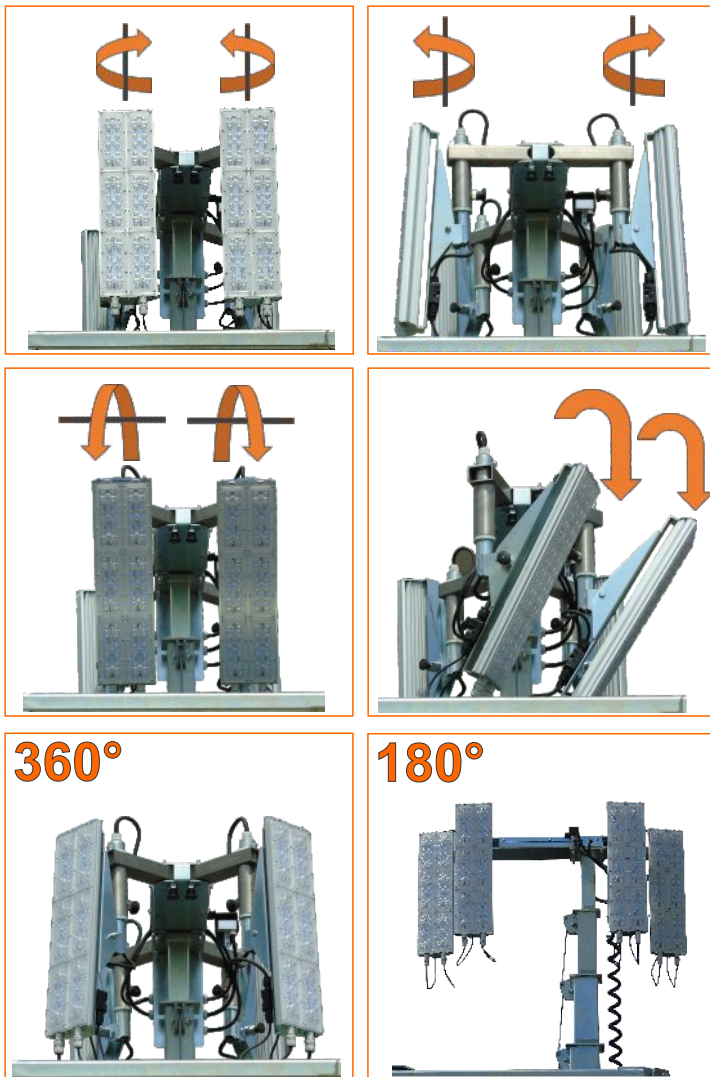

BOLTED FRAME

To provide high resistance against vibrations, wear and rust.

LIQUID CONTAINMENT TANK

To prevent spillages and leakages into the ground.


SAFE LOCKING STABILIZERS

An adjustable locking system fitted into the machine frame.

TOP ACCESSIBILITY

Five wide doors for complete access to the technical area.

ANTI-GLARE OPTION

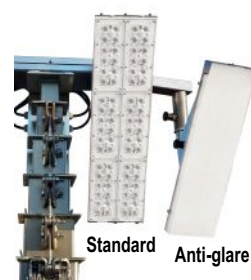

OPTIONS AVAILABLE

- Anti-glare shell
- Hot-dip zinc coating of mast sections
- Insulation monitoring device
- Earth picket with 5m cable
- Pre-heating system
- Dedicated colour
- Shut-off valve
- Schuko outlet socket (IP67)
- Certified spark arrestor
- Plastic box for documents
- Darkness sensor
- 110V sockets
- Remote controller (telemetric)
- Remote emergency stop controller